

AUTOMATIC HEAT PRESS



ROTOPRESS

 Pneumatic-automatic heat press

ROTOPRESS P2-4T / 6T



ROTOPRESS P2- 6T AUTO



ROTOPRESS P2-4T/6T


The automatic press with 4 or 6 rotating plates and 2 heating heads doubles production capacity compared to traditional presses, optimizing the transfer process and minimizing downtime. It allows simultaneous work by two operators and provides adjustable settings to ensure precise and high-quality results. Its versatility is further enhanced by interchangeable plates of various sizes.

FEATURES

- » **Dual Heating Heads:** Reduces transfer time by doubling hourly production capacity.
- » **PLC System:** Simple interface for easy adjustment of temperature, time, and pressure.
- » **Simultaneous Operation:** Two operators can work on different tasks at the same time.
- » **Plate Dimensions:** Available in 40 x 38 cm or 40 x 50 cm sizes.
- » **Customizable Settings:** Adjustable temperature (up to 210°C), time, and pressure for tailored results.
- » **Power Requirements:** 230 - 400 V 50Hz electrical supply with 4 KW consumption and pneumatic supply at 6 Bar.

OPTIONAL

A.T.P



Includes storage for up to 600 pieces and a motorized platform (50x50 mm to 380x400 mm).

INTERCHANGEABLE PLATES



Available in 38x40 cm and 40x50 cm sizes, ideal for textile and industrial applications.

LASER



Ensures precise transfer placement, available for 38x40 cm and 40x50 cm formats.

ROTOPRESS P2-6T AUTO


ROTOPRESS P2-6T AUTO is an automatic press that can be operated by a single operator or integrated with a robot for the automatic insertion of garments or pieces, thereby enhancing productivity and efficiency.

FEATURES

- » **Dual Heating Heads:** Reduces transfer time by doubling hourly production capacity.
- » **PLC System:** Simple interface for easy adjustment of temperature, time, and pressure.
- » **Plate Dimensions:** Available in 40 x 38 cm sizes.
- » **Customizable Settings:** Adjustable temperature (up to 210°C), time, and pressure for tailored results.
- » **Dual Heating Heads:** Enables transferring materials in half the time, doubling hourly production.
- » **Power Requirements:** 230 - 400 V 50Hz electrical supply with 6 KW consumption and pneumatic supply at 6 Bar.

SYSTEM

A.T.P



Equipped with a storage capacity of up to 600 pieces and a motorized platform for formats ranging from 50x50 mm to 380x400 mm.

S.T.A




Facilitates automatic removal of the transfer after pressing and disposal of excess material.

R.A.T



Removes the fabric from the press plate after the pressing process, streamlining workflow and reducing operator intervention.

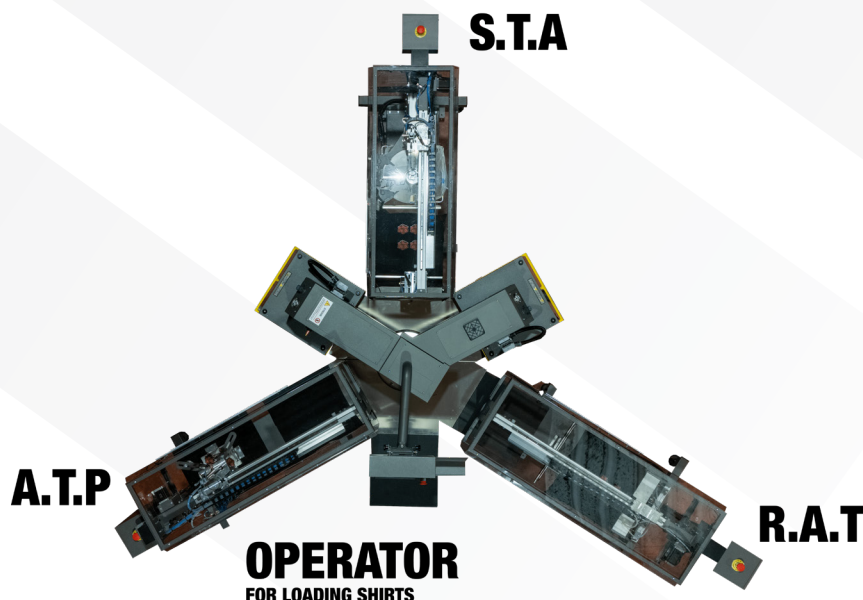

TECHNICAL SPECIFICATIONS

ROTOPRESS P2-4T/6T	
Plate Size	38x40 cm 40x50 cm
Max. Temperature	210 °C
Consumption	4 Kw
Power Supply	230 – 400 V 50Hz
Pneumatic Supply	6 Bar
Hz	50/60 Hz




ROTOPRESS P2-6T AUTO	
Plate Size	38x40 cm
Max. Temperature	210 °C
Consumption	6 Kw
Power Supply	230 – 400 V 50Hz
Pneumatic Supply	6 Bar
Hz	50/60 Hz



Ser.Tec. Srl

Via Emilio Salgari 14/d - 31056 Roncade (TV) - Italy
 Phone +39 (0)422 798184 - Fax. +39 (0)422 799711
 e-mail: sales@ser-tec.org - Website: ser-tec.org

 www.facebook.com/sertecsr

 www.instagram.com/sertecgroup



**Scan the QR code
and visit Rotopress's
product page**